

WALOSUMMER
Suspension light



Illustration may differ from original



APPLICATION:

The stainless-steel suspension lamp consists of a ceiling suspension bracket with a pendant OLED lamp arm. It creates a pleasant lighting atmosphere in the office, workspace or living room, among other areas.

TECHNICAL SPECIFICATIONS AND FEATURES:

Length of suspension lamp	~ 800 mm
Maximum height of the suspension	~ 1500 mm
Weight including light sources	~ 3,5 kg
Electrical connection	Connection terminal 3 x 1,5 [□]
Control gear	120-240 VAC 50/60 Hz
Connected load	22 W
Protection rating	I
CE conformity marking	
Switch/Dimming	Self-sufficient / battery-free radio switch (linear dimming). Switch with self-adhesive rear side for fixing in any place. Range approx. 10 m in closed rooms. The OLED lamp must be accessible at an angle of 90°. Lamp switches off automatically after 72 hours.

PRODUCT DESCRIPTION:

This OLED lamp is equipped with three delicately curved and exchangeable OLED light sources. All light sources can be rotated, making the lamp very flexible. As an alternative, each OLED light source can be exchanged by three other OLED shape variants. This makes our WALOSUMMER a highly individual lamp. The OLED lamp can be dimmed.

LIGHT SOURCES:




By default, this OLED lamp is equipped with three curved OLED light sources manufactured by OLEDWorks.

Connected load per light source	5,5 W (curved) 4 W (flat)
Expected life span per light source	30.000 h at 300 lm / LT 70
Color temperature	3000 K CRI >90, R9 >50
Luminous efficacy	55 lm/ W (curved) 75 lm/ W (flat)

OLED SHAPE VARIANTS:

The following models are available as alternative or replacement light sources

- curved
- (3 OLED panels included in the standard scope of delivery)
- square
- circle
- oblong

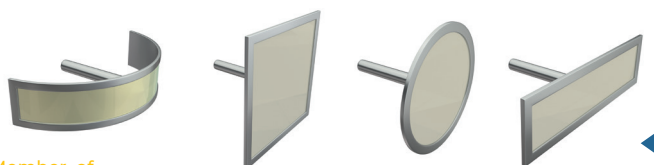

Member of

