

FIBER POLARIZATION CONTROLLER FPC-1



FIBER CONTROL INDUSTRIES polarization controller's unique user-friendly design utilizes stress-induced birefringence to alter and control the state-of-polarization of light in single-mode fibers. Each paddle acts as a fractional waveplate. Complete coverage of the Poincaré sphere and polarization control is provided by adjusting the angles of the paddles.

The multiple channel diameters were designed to maximize end-user flexibility over a variety of wavelengths and applications. Originally patented at Stanford University by Hervé C. Lefèvre, this product is fully licensed.

Immediate Delivery



P.O. Box 198
Holmdel,
New Jersey 07733
U. S. A.

Tel • 1-888-91-FIBER
Tel • +1-732-332-1860
Fax • +1-732-332-1861

info@fibercontrol.com
www.fibercontrol.com

☆☆ FULLY LICENSED ☆☆

FEATURES:

- Easy top-down fiber loading with paddles in locked position (no tools required)
- Dual diameter channels in each paddle broaden the wavelength operation of one fiber type
- Accommodates both 900 µm buffer and 250 µm bare fiber
- Sure grip pliable caps easily secure fiber in paddles
- Small footprint, lightweight design
- Multidirectional placement on optical table with 1/4" x 20 or M6 screws
- Smooth adjustable rotation

- Inserts quickly into fiber-based systems without splicing
- Multiple color paddles enhance identification for WDM


SPECIFICATIONS:

- Extinction Ratio (typical) 35 dB[†]
- Insertion Loss (typical) ≤ 0.1 dB[†]
- PDL (typical) 0.003dB
- Footprint Dimensions: 1.0" x 5.9"
25.4 mm x 150 mm
- Broadband operation: 500 nm to 1600 nm

[†] measured with Lucent SMF, two loops outer channel, at 1550 nm

When ordering, select from the option tables below:

FPC - 1 - - - - - PC -

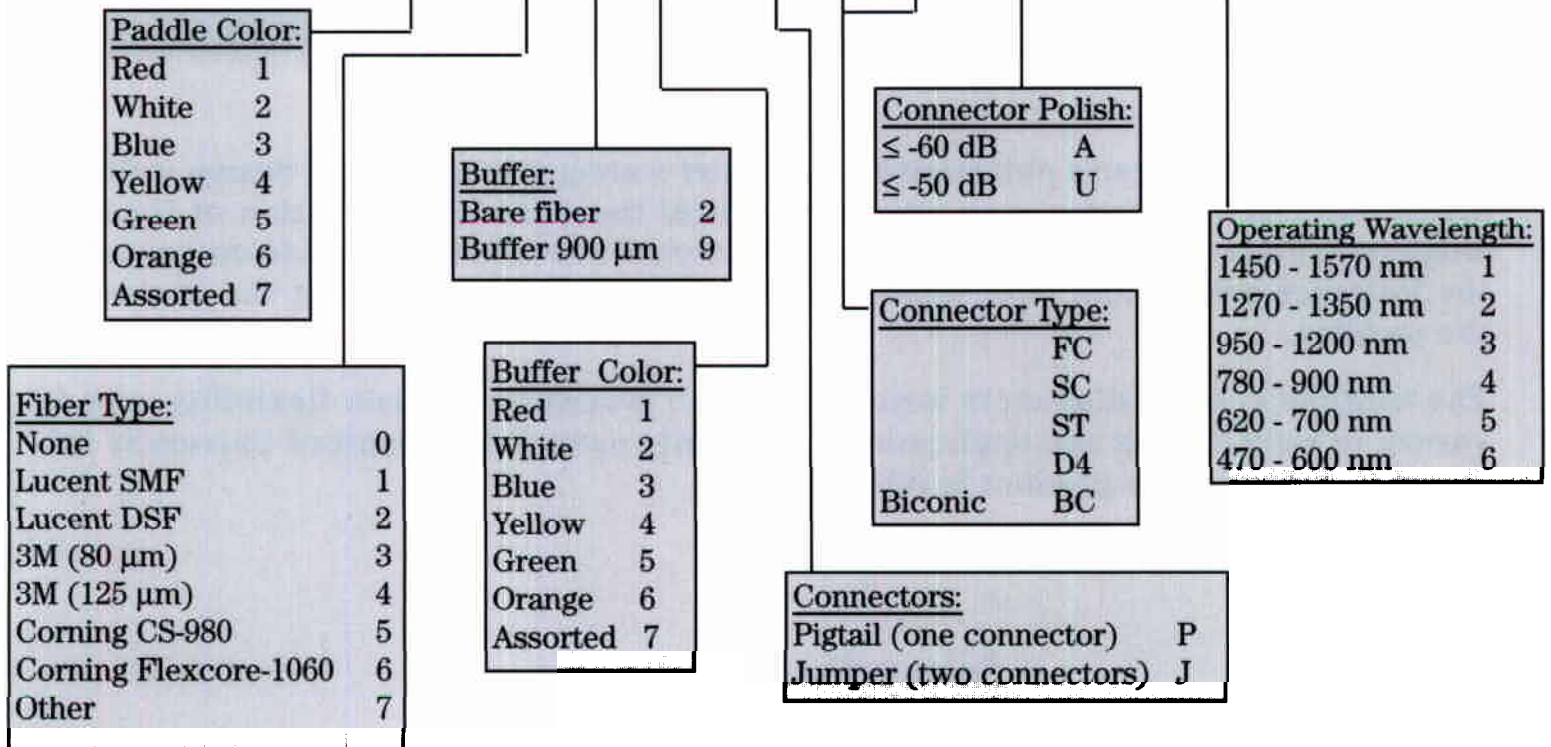

P.O. Box 198
Holmdel,
New Jersey 07733
U. S. A.

Tel • 1-888-91-FIBER
Tel • +1-732-332-1860
Fax • +1-732-332-1861

info@fibercontrol.com
www.fibercontrol.com