

R&S® TS-EMF PORTABLE EMF MEASUREMENT SYSTEM

Specifications



Data Sheet
Version 03.00

ROHDE & SCHWARZ

Make ideas real



CONTENTS

Definitions	3
Configurations	4
R&S®TS-EMF with R&S®FSH handheld spectrum analyzer	4
R&S®TS-EMF with R&S®Spectrum Rider FPH handheld spectrum analyzer.....	4
Specifications	5
Ordering information	6

Definitions

General

Product data applies under the following conditions:

- Three hours storage at ambient temperature followed by 30 minutes warm-up operation
- Specified environmental conditions met
- Recommended calibration interval adhered to
- All internal automatic adjustments performed, if applicable

Specifications with limits

Represent warranted product performance by means of a range of values for the specified parameter. These specifications are marked with limiting symbols such as $<$, \leq , $>$, \geq , \pm , or descriptions such as maximum, limit of, minimum. Compliance is ensured by testing or is derived from the design. Test limits are narrowed by guard bands to take into account measurement uncertainties, drift and aging, if applicable.



Non-traceable specifications with limits (n. trc.)

Represent product performance that is specified and tested as described under “Specifications with limits” above. However, product performance in this case cannot be warranted due to the lack of measuring equipment traceable to national metrology standards. In this case, measurements are referenced to standards used in the Rohde & Schwarz laboratories.

Specifications without limits

Represent warranted product performance for the specified parameter. These specifications are not specially marked and represent values with no or negligible deviations from the given value (e.g. dimensions or resolution of a setting parameter). Compliance is ensured by design.

Typical data (typ.)

Characterizes product performance by means of representative information for the given parameter. When marked with $<$, $>$ or as a range, it represents the performance met by approximately 80 % of the instruments at production time. Otherwise, it represents the mean value.

Nominal values (nom.)

Characterize product performance by means of a representative value for the given parameter (e.g. nominal impedance). In contrast to typical data, a statistical evaluation does not take place and the parameter is not tested during production.

Measured values (meas.)

Characterize expected product performance by means of measurement results gained from individual samples.

Uncertainties

Represent limits of measurement uncertainty for a given measurand. Uncertainty is defined with a coverage factor of 2 and has been calculated in line with the rules of the Guide to the Expression of Uncertainty in Measurement (GUM), taking into account environmental conditions, aging, wear and tear.

Device settings and GUI parameters are designated with the format “parameter: value”.

Non-traceable specifications with limits, typical data as well as nominal and measured values are not warranted by Rohde & Schwarz.

In line with the 3GPP standard, chip rates are specified in million chips per second (Mcps), whereas bit rates and symbol rates are specified in billion bit per second (Gbps), million bit per second (Mbps), thousand bit per second (kbps), million symbols per second (Msps) or thousand symbols per second (ksps), and sample rates are specified in million samples per second (Msample/s). Gbps, Mcps, Mbps, Msps, kbps, ksps and Msample/s are not SI units.

Configurations

The isotropic EMF test antennas measure with dedicated Rohde & Schwarz analyzers the electromagnetic emissions independently from direction and polarization.

The listed configurations are supported.

R&S®TS-EMF with R&S®FSH handheld spectrum analyzer

Application: Automated and manual EMF spectrum measurements, decoding of 3G and 4G signals with the related R&S®FSH options

R&S®FSH spectrum analyzer		all models
R&S®TS-EMF isotropic antenna		
Frequency ranges	30 MHz to 3 GHz	R&S®TSEMF-B1
	700 MHz to 6 GHz	R&S®TSEMF-B2
	700 MHz to 8 GHz	R&S®TSEMF-B2E
	9 kHz to 200 MHz	R&S®TSEMF-B3
Recommended option	EMF measurement application	R&S®FSH-K105



R&S®TS-EMF with R&S®Spectrum Rider FPH handheld spectrum analyzer

Application: EMF spectrum measurements

R&S®Spectrum Rider FPH		all models
R&S®TS-EMF isotropic antennas		
Frequency ranges	30 MHz to 3 GHz	R&S®TSEMF-B1
	700 MHz to 6 GHz	R&S®TSEMF-B2
	700 MHz to 8 GHz	R&S®TSEMF-B2E
	9 kHz to 200 MHz	R&S®TSEMF-B3
Converter cable		R&S®TSEMF-CV
Recommended option	EMF measurement application	R&S®FPH-K105

Specifications

Isotropic antennas	R&S®TSEMF-B3	R&S®TSEMF-B1	R&S®TSEMF-B2/-B2E
Measurement principle	isotropic reception due to orthogonally arranged antenna elements that are electronically switched		
Frequency range	9 kHz to 200 MHz	30 MHz to 3 GHz	700 MHz to 6 GHz/8 GHz
Minimum detectable field strength	approx. 1 mV/m		
Maximum field strength	see figures below		
Isotropy ¹	≤ ±1.37 dB	<ul style="list-style-type: none"> • ≤ ±2.1 dB • ±1.0 dB (f = 900 MHz) • ±1.7 dB (f = 1800 MHz) 	<ul style="list-style-type: none"> • ≤ ±2.5 dB (0.6 GHz to 2 GHz) • ≤ ±2.2 dB (2 GHz to 3.6 GHz) • ≤ ±3.0 dB (3.6 GHz to 7.5 GHz) • ≤ ±3.5 dB (7.5 GHz to 8 GHz)
Mechanical design	mechanical design radome protection against mechanical damage and environmental hazards		
Antenna factor	typical calibration data, saved on CD	individual calibration data, saved on CD	
Axis switching	RF solid state switch		
Connecting cables	direct connection to analyzer extension cable (length: 8 m); see accessories	integrated cable (length: 2 m), ferrite-beaded extension cable (length: 8 m); see accessories	integrated cable (length: 2 m), extension cable (length: 8 m); see accessories
RF connector	N male		
Connector, control line	7-pin connector (binder) for direct connection to R&S®FSH power sensor port, adapter cable R&S®TSEMF-CV for connection to R&S®FPH via USB port		
Tripod adapter	¼" thread, quick connector for antenna		
Expanded measurement uncertainty R&S®TS-EMF with R&S®FSH (95 % confidence level (k = 2))	≤ ±2.5 dB	<ul style="list-style-type: none"> • ≤ ±3.3 dB • ±2.3 dB at 0.9 GHz • ±2.9 dB at 1.8 GHz 	<ul style="list-style-type: none"> • ≤ ±3.15 dB (0.7 GHz to 1 GHz) • ≤ ±3.4 dB (1 GHz to 3.6 GHz) • ≤ ±3.9 dB (3.6 GHz to 7.125 GHz) • ≤ ±4.1 dB (7.125 GHz to 7.5 GHz) • ≤ ±4.6 dB (7.5 GHz to 8 GHz)
Ambient conditions	-10 °C to +50 °C, protection class: IP54		
Dimensions (L x Ø)	550 mm x 146 mm (21.7 in x 5.75 in)	475 mm x 170 mm (18.7 in x 6.69 in)	415 mm x 87 mm (16.3 in x 3.43 in)
Weight (incl. cable)	0.85 kg (1.87 lb)	1.3 kg (2.87 lb)	0.95 kg (2.09 lb)

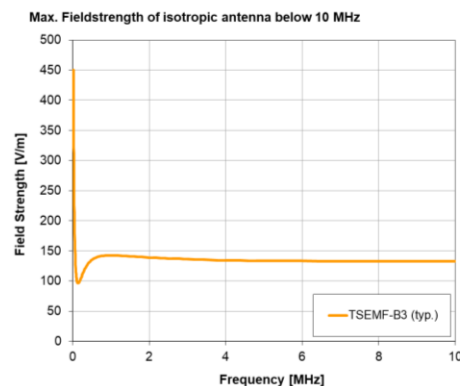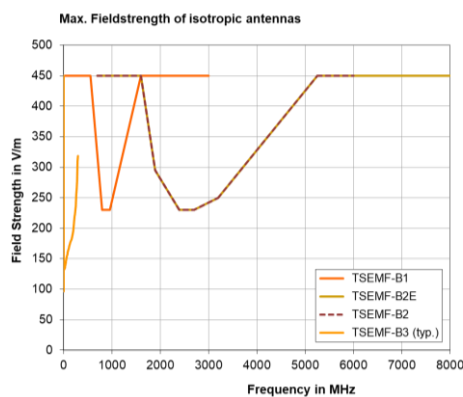

Maximum field strength for R&S®TS-EMF isotropic antennas

¹ For assessment of the sensor isotropy, sensors have been measured with step sizes of 2° in theta and phi with radiation in both, horizontal and vertical polarization. For each tested frequency range, the mean value and standard deviation over the sphere has been evaluated. The raw measurement results have been weighted to compensate for decreasing size of the arc sections near the pole. Because real antennas cannot receive radiation in the area of the handle, all figures related to isotropy of the R&S®TS-EMF-B1 and R&S®TS-EMF-B2 exclude a cone of 30° around the handle.

Ordering information

Designation	Type	Order No.
Portable EMF measurement system, hard case	R&S®TS-EMF	1158.9295.05
Options		
Isotropic antenna, 30 MHz to 3 GHz	R&S®TSEMF-B1	1074.5719.02
Isotropic antenna, 700 MHz to 6 GHz	R&S®TSEMF-B2	1074.5702.02
Isotropic antenna, 700 MHz to 8 GHz	R&S®TSEMF-B2E	1074.5702.03
Isotropic antenna, 9 kHz to 200 MHz	R&S®TSEMF-B3	1074.5690.02
Accredited calibration, for R&S®TSEMF-B1	R&S®ACATSEMF-B1	3598.7183.03
Accredited calibration, for R&S®TSEMF-B2	R&S®ACATSEMF-B2	3598.7190.03
Accredited calibration, for R&S®TSEMF-B2E	R&S®ACATSEMF-B2E	3599.1043.03
Accredited calibration, for R&S®TSEMF-B3	R&S®ACATSEMF-B3	3598.8680.03
External accessories		
Cable set, for R&S®TS-EMF, up to 8 GHz (length: 8 m)	R&S®TS-EMFZ2	1166.5708.06
Cable set, for R&S®TS-EMF, up to 8 GHz, with DAkkS calibration (length: 8 m)	R&S®TS-EMFZ2	1166.5708.07
EMC tripod, for R&S®TS-EMF	R&S®TSEMF-O3	1101.8477.03

Service at Rohde & Schwarz
You're in great hands

- ▶ Worldwide
- ▶ Local and personalized
- ▶ Customized and flexible
- ▶ Uncompromising quality
- ▶ Long-term dependability

Rohde & Schwarz

The Rohde&Schwarz technology group is among the trail-blazers when it comes to paving the way for a safer and connected world with its leading solutions in test & measurement, technology systems and networks&cybersecurity. Founded more than 85 years ago, the group is a reliable partner for industry and government customers around the globe. The independent company is headquartered in Munich, Germany and has an extensive sales and service network with locations in more than 70 countries.

www.rohde-schwarz.com

Sustainable product design

- ▶ Environmental compatibility and eco-footprint
- ▶ Energy efficiency and low emissions
- ▶ Longevity and optimized total cost of ownership

Certified Quality Management

ISO 9001

Certified Environmental Management

ISO 14001

Rohde & Schwarz training

www.training.rohde-schwarz.com

Rohde & Schwarz customer support

www.rohde-schwarz.com/support

